

# EXPERIMENTAL METHOD FOR SPRAY VELOCITY FIELD PREDICTION MODEL IN PRESSURE SWILL ATOMIZERS

E. J. J. Souza  
and M. J. J. S. Ponte

Universidade Federal do Paraná  
Departamento de Engenharia Mecânica  
Bairro Jardim das Américas  
CP. 19011, CEP: 81531-980  
Curitiba, Paraná, Brasil  
andiogenes@ufpr.br

## ABSTRACT

Pressure swirl atomizers are widely used in engineering as an effective device for vaporization and liquid mass transfer in physical or chemical processes. Among many applications those atomizers are used in modern fuel injection systems for spark engines. An even fuel and air mixture may increase the overall engine performance by higher efficiency and low flue gas emissions. In applied atomization, one of the most important characteristics is the spray velocity field prediction. Droplet sizing models are also important, but they are relatively popular on books and papers. By the other hand spray velocity field prediction and profile is relatively rare. This work focus on the prediction of the velocity field of pressure swirl atomize by means of an experimental approach and applied statistics. For the spray measurements this study used a non-intrusive, quantitative method by Laser Doppler Interferometry (LDI) for the spray velocity field and droplet sizing. Also four models for the film thickness calculation at atomizer discharge are compared considering their statistical significance.

**Keywords:** fuel injection, pressure swirl atomizer, spray velocity field

## NOMENCLATURE

$d_0$	Orifice diameter	[m]
$d_n$	Internal air diameter at orifice	[m]
$t_0$	Liquid film thickness at orifice	[m]
$A_0$	Orifice area = $\pi (d_0^2/4)$	[m <sup>2</sup> ]
$A_n$	Air nuclear area = $\pi (d_n^2/4)$	[m <sup>2</sup> ]
$L_b$	Break up length	[m]
$U_0$	Liquid velocity at orifice outlet	[m/s]
$U_g$	Droplet velocity at position (Z, $\theta_g$ )	[m/s]
$p$	Liquid pressure gauged upstream the orifice	[N/m <sup>2</sup> ]
$d_g$	Droplet Sauter mean diameter- SMD	[m]
$Y$	Droplet position (radial)	[m]
$Z$	Droplet position downstream	[m]

## Greek symbols

$\alpha$	Spray angle	rad
$\rho_a$	Air density	[kg/m <sup>3</sup> ]
$\rho_L$	Liquid density	[kg/m <sup>3</sup> ]
$\sigma$	Surface tension	[kg/s <sup>2</sup> ]
$\mu$	Liquid dynamic viscosity	[kg/ms]
$\theta$	Spray semi angle	rad
$\theta_g$	Droplet semi angle position	
$\Theta_g$	= arc tangent (Y/Z)	rad

## INTRODUCTION

The performance of an internal combustion engine depends on several factors related to the

machine and engine operation. Most of the improvements achieved in decreasing emissions and increasing performance in either diesel or spark engines are due to the optimization of the injection systems. The nozzle design plays an important role of the overall spray quality. An even and well distributed fuel and air mixture at the engine inlet is a common goal of vehicle manufacturers worldwide. Modern market demands two fundamental performance features: energy conservation and emission control, even for GHG (greenhouse gases). In fact the electronic fuel injection technology gave a tremendous improvement in spark engine performance surpassing the old carburetor definitively.

In conventional spark engines the fuel is sprayed in the intake manifold at the mixing zone, just a few centimetres upstream of the intake valve. Taylor (1988) says that as important as the air-fuel flow rates is the mixture quality. The sprayed mixture should be as even and uniform as possible in order to promote good droplet vaporization and, on some spots, a controlled droplet penetration.

Conventional injection systems typically employ special pressure swirl atomizers. Such an injector generates a hollow-cone, large angle spray of droplets. The liquid flows through the discharge orifice with angular velocity achieved by helical grooves which is internally machined upstream the orifice. The spray formed has three discrete velocity

components in axial (main), tangential and radial direction.

One of the most important features in a fully developed spray is the droplet size and velocity. As a matter of fact droplet penetration and vaporization are related to the droplet size and velocity. Important research and development of sprays and the fuel injection performance seek the size and velocity determination. In order to improve the air/ fuel mixture performance the droplet size prediction is mandatory at certain distance “Z” downstream the orifice discharge. One of the main approaches for estimating the spray the droplet size is the experimental study of deterministic models. The spray velocity field is also important because different spray zones have their own mean velocity. In a hollow cone spray the mass flow distribution and droplet momentum allows to preview the liquid penetration at the engine inlet valve.

Some authors such as Lefebvre and Yule (1996) studied extensively pressure-swirl atomizers. Other important contributions such as Chrysos (2003) and Souza (2009) have shown a comparative evaluation of the calculation models for predicting the spray mean diameter (SMD). The droplet size estimation are more present in papers and books, however the spray velocity and even more the velocity field where  $v=v(X,Y,Z)$  are more rare.

Among all the necessary parameters for determination of the spray flow and spraying performance the calculation of the liquid film thickness in the annular flow at discharge orifice is mandatory. To be able to succeed with experimental models however, it is necessary to calculate such film thickness at the discharge orifice. According to Lefebvre (1989) there are four models for calculating the estimative thickness, respectively proposed by Simmons and Harding, Risk and Lefebvre, Griffin and Muraszew, and finally Griffen and Risk.

This paper shows an experimental approach for the spray studies using statistical correlation between the operating conditions and the droplet velocity field. Also the four models for annular film calculation have been evaluated upon a set of statistical criteria based on significance and variance analysis. Furthermore by using the same approach it was possible elect the calculation model that best fits the size and velocity field for this kind of pressure swirl atomizers.

## SPRAY IN A PRESSURE SWIRL ATOMIZERS

In pressure swirl atomizers used in fuel injection systems the spray cone has a typical morphology as shown in Fig.1. There is a conventional picture of the spray and the three main zones of the spray and droplets formation. The spray may be identified by distinct regions of instability following the liquid from the tip up to fully developed spray.

The liquid passes through the discharge orifice and so it gets axial and angular acceleration due to

internal grooves. The liquid angular acceleration becomes tangential component of velocity just downstream the orifice. Also the liquid gains axial and radial velocity leading to a conical shape. By the mass conservation the liquid film thickness becomes thinner as the spray expands. The flow momentum generates disturbances that breaks the surface tension and viscous forces leading to film break up to ligaments. At the beginning of zone 2 unstable ligaments come up, just downstream the film break up. Due to certain vibration instability the ligaments break up results in zone 3 where drops and finally droplets are formed.

Because the angular velocity the liquid film flows through the orifice creating an annular section and an air empty core. The discharge factor is naturally low, around 0.3 to 0.4 as stated by Lefebvre (1989). The experiments performed in this study showed and the operating conditions set, the average discharge factor was 0.32.

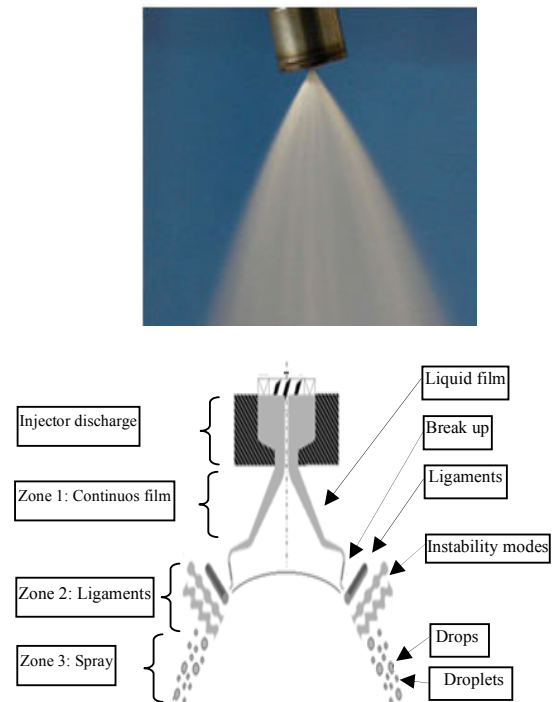


Figure 1. Pressure swirl atomizer used in fuel injectors and the spray - morphology. The spray - morphology of a Ter conical spray and morphology.

## APPROACH

### Spray Velocity Field

Considering the injector geometry at the orifice section the effective annular flow area demands specific calculation models and peculiar fluid mechanics equations. In despite of the injector geometry simplicity the hydrodynamics of the atomization process at those atomizers is complex

and highly dissipative (Lefebvre, 1989). In this work the details of the internal geometry of the tip will only be considered for the liquid film calculation purposes. It has been assumed that the injector has a fixed, typical geometry of commercial injectors.

The figure 2 shows the conical spray diagram and the related variables of the spray cone.

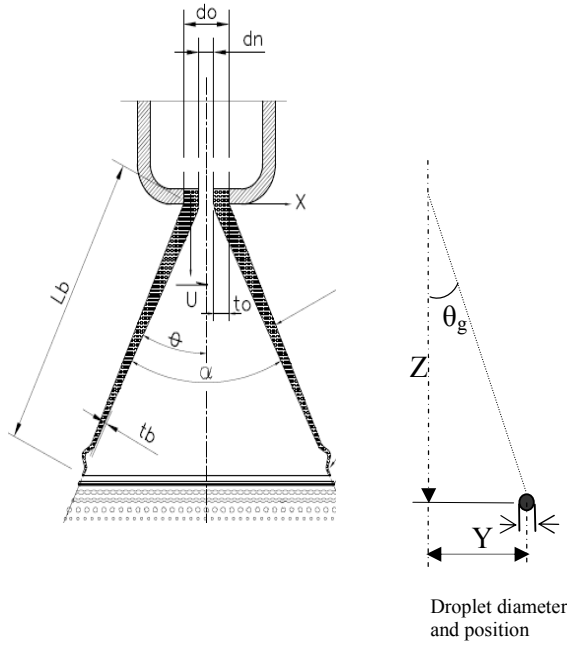


Figure 2. Conical spray.

From the continuity equation

$$\dot{m}_L = U_0 \rho_L (A_0 - A_n) \quad (1)$$

The calculation of the liquid film thickness  $t_0$  at the orifice discharge is

$$t_0 = \frac{d_0 - d_n}{2} \quad (2)$$

And, the “X” ratio is

$$X = \frac{A_n}{A_0} = \left( \frac{d_n}{d_0} \right)^2 \quad (3)$$

Considering the film thickness  $t_0$ ,

$$X = \frac{(d_0 - 2 \cdot t_0)^2}{d_0^2} \quad (4)$$

The “flow number”

$$F_N = \frac{\dot{m}_L}{\sqrt{\Delta P \cdot \rho_L}} \quad (5)$$

And the discharge factor

$$Cd = \frac{\dot{m}_L}{\dot{m}_{teórica}} \quad (6)$$

Besides the relations of the atomizer flow, many other quantities are involved in the atomization process. Lefebvre (1987) says that the main features of the spray as its diameter and velocity field depend on the atomizer geometry and the liquid flow characteristics. Authors such as Welty (1984) confirm such assertion. Thus it is possible to establish a set of flow variables and geometry data that represents the atomization phenomena. In this work the main spray dependent variable is the droplet velocity  $U_g$ . According to Lefebvre (1989) the main quantities involved in the atomization process is presented in equation (7). Assuming the mean velocity at a specific position in the spray as the main dependent variable  $U_g = U_g(X, Y, Z)$  or in a conical spray  $U_g = U_g(Z_g; \theta_g)$  or  $U_g = U_g(Z; \theta_g)$ . The correlation function “f” may be written as follows:

$$U_g = f(U_0; \rho_a; \rho_L; \theta_g; d_0; p; \mu; \sigma; z_g) \quad (7)$$

Where the function “f” shown in equation (7) correlates the dependent and the independent variables.

A spray approach using only fluid mechanics equations is very complex because the phenomena of liquid fragmentation is strongly dissipative (Lefebvre, 1989) and so it is necessary to set a strong boundary assumptions in order to reach the Navier-Stokes’ equation solution. Nowadays the use of computation fluid dynamics CFD for the atomization studies gives results of difficult validation. So an experimental approach becomes a good alternative method.

In this paper the statistical approach demanded a test plan and the observation of the dependent and independent variables observation in order to seek correlations with acceptable significance in engineering. However a test plan with several levels in all the variables is a time consuming process since it requires an extensive test plan. A good choice is to organize the correlation between the variables by dimensional analysis according to the “ $\pi$ ” Buckingham theorem. Dimensionless groups are created that condense the variables and eliminate errors related to size. Using the theorem to the variables can be organized as follows:

$$\frac{U_g}{U_0} = f\left(\frac{\rho_a}{\rho_L}; \frac{z}{d_0}; \frac{p}{U_0^2 \cdot \rho_L}; \frac{U_0 \cdot \rho_L \cdot d_0}{\mu}; \frac{\rho_L \cdot U_0^2 \cdot d_0}{\sigma}; \frac{\theta_g}{\theta}\right) \quad (8)$$

The dimensionless groups in the correlation function (8) shows the main dependent variable, the ratio of the droplet velocity “ $U_g$ ” and the liquid velocity “ $U_0$ ” through the atomizer orifice. By the other hand all the independent variables appear as dimensionless numbers such as ratios for densities, the axial position, the Euler, Reynolds and Weber number and finally the position angle of the droplet. For nomenclature purposes all dimensionless numbers can be renamed to “P” parameters, starting with the dependent variable  $U_g/U_0 = P_1$  and the dependent parameters as  $P_2, P_4$  and so on, as shown in equation (8a). The parameter  $P_3$  has been the droplet diameter ratio, not shown in this paper.

$$P_1 = f(P_2; P_4; P_5; P_6; P_7; P_8) \quad (8a)$$

As the atomization phenomena are strongly dissipative and so the correlation function “f” presented on equation 8a was initially assumed to be nonlinear. The proposed correlation model was the equation (9) where “c2” to “c8” are exponents of dimensionless parameters to be found. Then the correlation model was based upon a multiple nonlinear regression with six exponents (c2 and c4 to c8) to be determined.

$$P_1 = 1 \cdot (P_2)^{c_2} \cdot (P_4)^{c_4} \cdot (P_5)^{c_5} \cdot (P_6)^{c_6} \cdot (P_7)^{c_7} \cdot (P_8)^{c_8} \quad (9)$$

It was necessary to create a test database by measuring all operating data upstream the injector tip, calculating the dimensionless figures and the measurement of droplet size. After determining the exponents the resulted correlation has been evaluated regarding the significance criteria and the variance analysis – ANOVA.

In several dimensionless parameters the discharge velocity  $U_0$  seems to be the most important variable since it appears in several groups.

With the measurements of liquid mass flow rate at the orifice and the continuity equation (1) it is possible to calculate the discharge velocity using the diameter of air core or indirectly the film thickness  $t_0$  by equation (2). This variable can be calculated by mathematical models proposed by some authors, considering that the direct measurement at the orifice section is quite complex, as commented by Chrysosakis (2003).

#### Liquid Film Thickness $t_0$ Calculation

A major study on calculating the thickness  $t_0$  was presented by Lefebvre (1996) and later a review by Chrysosakis (2003), which showed comparisons of calculation models available, based on an experimental database. However

Chrysosakis’ research was based on generic atomizer, not a set of engine injectors. In addition, he has several reservations about the models whereas the database used was based on tests with water only. Finally the author recommends further studies of the calculation models and experimental validation for selecting the most appropriate one. The four main calculation models are:

#### 1 Equation of Muraszew & Griffen

$$\left( \frac{A_p}{D_s d_0} \right)^2 = \frac{\pi^2}{32} \left( \frac{(1-X)^3}{X^2} \right) \quad (10)$$

Where  $A_p$  is the area of internal ports (grooves) upstream the orifice, as they generate rotation (swirl) and  $D_s$  the equivalent diameter of these ports, upstream of the discharge orifice and  $X$  is the ratio of areas, given by equation (3).

#### 2 Equation of Simmons e Harding, from experimental data,

$$t_0 = 0,00805 \cdot \frac{\sqrt{\rho_L} \cdot F_N}{d_0 \cdot \cos \theta} \quad (11)$$

#### 3 Equation of Risk e Lefebvre

$$t_0 = 2,7 \cdot \left[ \frac{d_0 \cdot F_N \cdot \mu}{\sqrt{\rho_L \cdot \rho_L}} \right]^{0,25} \quad (12)$$

#### 4 Equation of Griffen e Risk

$$0,09 \cdot \left( \frac{A_p}{D_s d_0} \right) \left( \frac{D_s}{d_0} \right)^{0,5} = \frac{(1-X)^3}{X^2} \quad (13)$$

In order to achieve the model that best fits the injector atomization this work was based upon a statistical approach. Then the analysis criteria were based on the correlation of the independent variables upstream the discharge and the measurements of the droplet velocity at position “Z” and semi-angle  $\theta_g$ . This approach, however, demanded the formation of a database of tests by varying the pressure, the relative position of the spray region and the test liquids.

The database demanded an appropriate test plan, which offers measurement liability of the independent variables and, above all, the dependent variable. For the independent variables the measurements have been taken using conventional methods and for the velocity measurements was used laser based PDI- Phase Doppler Interferometry.

Finally the selection criteria were based on the statistical significance of the correlation in order to choose the best model for the application.

## TEST PLAN

The test plan focused on the variability of the quantities involved in equation (8) and the dependent variable such as velocity in a certain position of the spray  $U_g = U_g(\theta, Z)$ . The spray has been assumed axisymmetric and the flow is continuous at a steady state. For the droplet sizing the *PDI* laser system kept the laser beams crossing at a specific reading volume at the position  $(\theta, z)$  for 10 seconds per run. During that period of time an average of  $10^4$  droplets have been measured in the spray. No studies of transient effects have been carried out.

For each test the liquid film thickness has been calculated at the orifice using the four models presented in 3.2.1 to 3.2.4. They led to four different film thicknesses  $t_0$ . With each calculated value of thickness was possible to calculate the velocity of the fluid at the discharge  $U_0$ . The independent variables of equation (7) had four related factors: the average velocity, the test liquid, pressure and position of the droplet. In each of these factors were related to independent variables. The levels were different for each variable, as shown in table 2 below:

Table 1. Test Plan – Independent Variables.

<b>Injector</b>	Main variable: orifice diameter $d_0 = 0.568; 0.584; 0.585; 0.598; 0.606$ and $0.614$ mm (six levels)
<b>Liquids</b>	Main variables: $\rho$ ; $\rho_L$ ; $\sigma$ ; $\mu$ (nine levels)
<b>Pressure</b>	Main variable: pressure = 1, 2, 4, 6 and 8 MPa (five levels)
<b>Droplets SMD relative position</b>	Main variable: $\theta$ For $Z = 40$ mm; $Y$ (4, 8, 12, 16, 18, 20, 22, 24, 26, 28, 32 e 36mm) and $Z = 40$ mm (cte) $d_g = d_g(\theta, z)$

The test plan assumed a set of test liquids with different physical properties as shown in Table 3. A total of nine liquids referring to the respective levels of the test plan in Table 2, including: four types of gasoline, two types of ethanol and water-based mixtures in order to give properties variability. The values of  $\rho$ ,  $\rho_L$ ,  $\mu$  and  $\sigma$ , at different temperatures were measured in laboratory using, respectively, an Anto Parr densimeter, a Kruss tensometer and an Herzog viscometer according to ASTM "American Society for Testing and Materials" standard methods. In each test the conditions were logged upstream the injector, especially pressure and temperature. The physical properties were obtained by interpolation of measured values.

## SPRAY TEST RIG

The test database demanded the construction of a spray test rig with flow meters, pressure gauges,

thermometers and the Phase Doppler Interferometry system. Moreover, due to the use of several test liquids, including hydrocarbon fuels and other compounds, it was necessary to use the test bench with safety devices. The spray measuring device used an enclosure with inert gas purge for the spray discharge to avoid hazardous mixtures.

Table 2. Test liquids.

Ident.	Liquid Data (as laboratory measurements)				
	Density	Viscosity		Surface tension	
	$\rho$ (kg/m <sup>3</sup> )	$\nu$ (10°C) (cSt)	$\nu$ (25°C) (cSt)	$\sigma$ (10°C) (mN/m)	$\sigma$ (25°C) (mN/m)
<b>FL1</b>	687.8	0.72	0.63	20.80	19.20
<b>FL2</b>	699.0	0.77	0.66	20.40	18.40
<b>FL3</b>	806.8	2.28	1.60	23.20	22.10
<b>FL4</b>	795.1	1.95	1.46	24.50	23.40
<b>FL5</b>	997.84	1.31	1.00	74.22	72.74
<b>FL6</b>	1149.2	14.55	7.47	54.50	54.30
<b>FL7</b>	1124.1	7.62	4.27	55.50	56.60
<b>FL8</b>	750.17	0.80	0.67	22.40	21.90
<b>FL9</b>	752.03	1.09	0.67	23.10	21.50

FL1 – Gasoline 1

FL2 – Gasoline 1

FL3 – Ethanol 1

FL4 – Ethanol 2

FL5 – Water

FL6 – Water (40%) + Glycerin (60%)

FL7 – Water (50%) + Glycerin (50%)

FL8 – Gasoline 3

FL9 – Gasoline 4

The bench tests focused on the generation of sprays and so variables and parameters involved in the phenomenon could be measured and compared with the average droplet velocity. Figure 3 shows the flowchart of the bench, including droplet measurements with the PDI laser system.

## MEASUREMENTS

About 470 tests have been performed varying the six independent variables shown in the correlation function (8). Especially the dimensionless numbers Euler, Reynolds and Weber, respectively represented by P5, P6 and P7 have been measured in the test runs. The Euler number ranged from 0.76 to 3.08 and so passing by the unit. The Reynolds number varied from 995 to 46,000 and so from laminar to turbulent flow and finally the Weber number varied from 0.9 to 60, also passing by the unit. This variability is especially useful for the analysis of flow regimes and evaluation force scale involved in the phenomenon of fragmentation. The results were compiled into a spreadsheet containing the valid tests. A reprint of the illustrative database shown in Table 4.

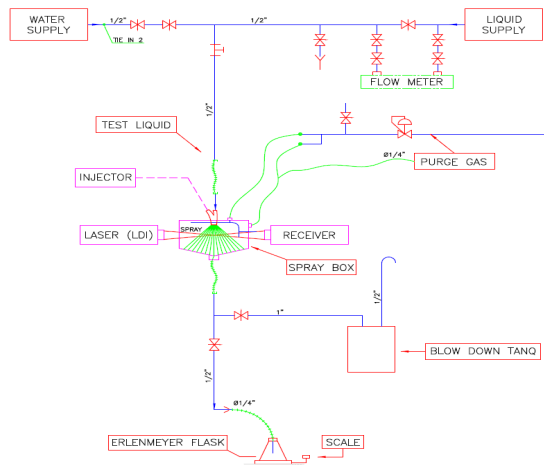


Figure 3. Atomization test rig- flow sheet.

Table 3. Reprint Database.

$\frac{U_g}{U_0}$	$\frac{\rho_a}{\rho_L}$	$\frac{d_g}{d_0}$	$\frac{Z}{d_0}$
$U_g / U_0$	$\rho_a / \rho_L$	$d_g / d_0$	$Z/U_0$
P1	P2	P3	P4
0.6832	0.0011	0.1129	68.49
0.6366	0.0011	0.1131	68.49
0.6025	0.0011	0.1138	68.49
0.5643	0.0011	0.1135	68.49
0.6980	0.0011	0.1136	68.49
0.7363	0.0011	0.1145	68.49
0.7496	0.0011	0.1087	68.49
0.7378	0.0011	0.1107	68.49
0.7362	0.0011	0.1127	68.49
0.7233	0.0011	0.1130	68.49
0.7029	0.0011	0.1140	68.49
0.7156	0.0011	0.1152	68.49
0.6652	0.0011	0.1142	68.49

$\frac{P}{U_0^2 \cdot \rho_L}$	$\frac{U_0 \cdot \rho_L \cdot d_0}{\mu}$	$\frac{U_0^2 \cdot \rho_L \cdot d_0}{\sigma}$	$\frac{\theta_g}{\theta}$
Eu	Re <sub>0</sub>	We <sub>0</sub>	$\theta_0 / \theta$
P5	P6	P7	P8
1.7016	7373.76	0.9556	0.70
1.6993	7399.20	0.9582	0.75
1.7021	7367.37	0.9451	0.80
1.7047	7338.91	0.9330	0.85
1.7055	7329.54	0.9261	0.64
1.7090	7290.45	0.9156	0.59
1.6761	7668.48	0.9906	0.59
1.6741	7691.24	0.9969	0.64
1.6719	7717.79	0.9996	0.70
1.6694	7748.26	1.0033	0.75
1.6697	7744.47	1.0022	0.80
1.6675	7771.26	1.0049	0.85
1.6665	7782.93	1.0033	0.89

For the calculation of each model proposed in equations (10) to (13) a specific database like Table 3

has been created. These data were undergone to data reduction and analysis of variance. In order to get the best equation for calculating  $t_0$  it was necessary to process the database tailored for each equation. The criteria for choosing the best one was, at first, the coefficient of multiple determination "R<sup>2</sup>" and the evaluation of p-value compared to the level of significance "alpha" of 5%. With the choice of the best proposal was possible to deepen the statistical evaluations of the regression model. The comparative results are presented in Table 5 as follows:

Table 4. Comparison of models for droplet diameter by several proposals for the calculation of  $t_0$ .

Diameters	Exponents	Estimate	Standard error	t-value
Simmons & Harding R <sup>2</sup> = 0,9354	c2	0.287682	0.044912	6.4055
	c4	0.280809	0.077399	3.6281
	c5	0.260518	0.127956	2.0360
	c6	-0.125624	0.016001	-7.8512
	c7	-0.175047	0.016579	-10.5586
Risk & Lefebvre R <sup>2</sup> = 0,9456	c2	0.655797	0.037585	17.4485
	c4	-0.21520	0.066976	-3.2131
	c5	0.32532	0.070942	4.5858
	c6	-1.32789	0.150021	-8.8514
	c7	-0.46838	0.042858	-10.9287
Griffen & Murszew R <sup>2</sup> = 0,9312	c6	-0.19837	0.013567	-14.6212
	c8	0.65433	0.034167	19.1509
	c2	0.49212	0.057595	8.5444
	c4	0.12359	0.074744	1.6536
	c5	-1.02212	0.154377	-6.6210
Griffen & Risk R <sup>2</sup> = 0,9432	c6	-0.06160	0.014919	-4.1289
	c7	-0.21766	0.016581	-13.1272
	c8	0.63728	0.037973	16.7827
	c2	0.51904	0.054057	9.6016
	c4	0.20816	0.067560	3.0812
Griffen & Risk R <sup>2</sup> = 0,9432	c5	-1.23229	0.156134	-7.8925
	c6	-0.09736	0.013769	-7.0706
	c7	-0.22605	0.014864	-15.2078
	c8	0.68990	0.034487	20.0046

Diameters	Exponents	p-value	Lo. Conf Limit (alpha = 0,05)	Up. Conf Limit (alpha = 0,05)
Simmons & Harding R <sup>2</sup> = 0,9354	c2	0.000000	0.199415	0.375948
	c4	0.000319	0.128695	0.432923
	c5	0.042344	0.009043	0.511993
	c6	0.000000	-0.157071	-0.094178
	c7	0.000000	-0.207630	-0.142465
Risk & Lefebvre R <sup>2</sup> = 0,9456	c8	0.000000	0.581931	0.729663
	c2	0.001411	-0.34684	-0.08356
	c4	0.000006	0.18589	0.46476
	c5	0.000000	-1.62275	-1.03304
	c6	0.000000	-0.55262	-0.38415
Griffen & Murszew R <sup>2</sup> = 0,9312	c7	0.000000	-0.22504	-0.17170
	c8	0.000000	0.58718	0.72149
	c2	0.000000	0.37893	0.605303
	c4	0.098910	-0.02329	0.270481
	c5	0.000000	-1.32550	-0.748737
Griffen & Risk R <sup>2</sup> = 0,9432	c6	0.000043	-0.09092	-0.032280
	c7	0.000000	-0.25025	-0.185079
	c8	0.000000	0.56266	0.711909

<b>Griffen &amp; Risk R<sup>2</sup> = 0,9432</b>	<b>c2</b>	0.000000	0.41280	0.625278
	<b>c4</b>	0.002189	0.07539	0.340937
	<b>c5</b>	0.000000	-1.53914	-0.925446
	<b>c6</b>	0.000000	-0.12442	-0.070297
	<b>c7</b>	0.000000	-0.25526	-0.196834
	<b>c8</b>	0.000000	0.62213	0.757682

Evaluating the results and considering the criteria of the coefficient of multiple determination "R<sup>2</sup>" the top performers were from Griffen and Risk and Lefebvre models, with a little difference. But making an analysis of variance of the regression using the Risk and Lefebvre model all the "c" exponents are significant. The largest p-value is 0.0014 for the exponent c2, but still well below the level of significance an alpha-cut, adopted as 0.05 or 5%. Also the prediction model for the droplet mean diameter, according to the constraints and assumptions of this work, is shown by the following equation.

$$\frac{U_g}{U_0} = \left( \frac{\rho_a}{\rho_f} \right)^{-0,5836} \cdot \left( \frac{z}{d_0} \right)^{-0,5077} \cdot Eu^{-0,4819} \cdot Re^{-0,2077} \cdot We^{-0,2953} \cdot \left( \frac{\theta_g}{\theta} \right)^{0,4239} \quad (14)$$

Comparing the measurements results with the predicted values of droplet average velocity from equation (14) there is excellent consistency, as shown in the figure (4).

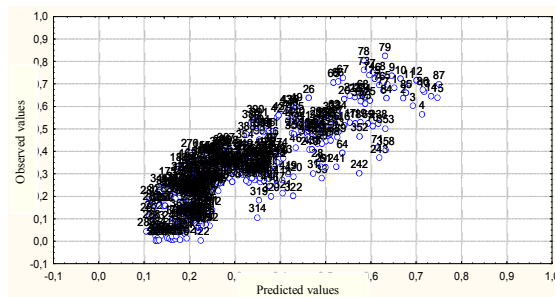


Figure 4. Correlation between the predicted and observed  $U_g/U_0$  values.

Finally, the regression model for the spray droplet velocity was undergone to an analysis of variance. Table 6 below shows the results for the P3 model is, the diameter ratio  $d_g/d_0$ , the dependent variable

Table 5. Variance analysis for the equation (14)

	Sum of Squares	Degrees of freedom	Mean Squares
<b>Regression</b>	55,47215	6	0,2453
<b>Residual</b>	3,8846	434	0,00895
<b>Total</b>	<b>59,65581</b>	<b>440</b>	

	F - value	P - value	
<b>Regression</b>	1032,91	0,00	

The variance analysis indicates the model has good statistical significance. The p-value shows up the regression model has non-zero exponents and so the independent variables have acceptable significance. The quality of fit is evaluated by multiple correlation coefficients squared as follows:

$$R^2 = \frac{SQ_{\text{regression}}}{SQ_{\text{total}}} = \frac{55,47215}{59,65581} = 0,9298 \quad (15)$$

The ratio indicates that the model for the mean droplet diameter is excellent as it explains 92.98% of the variation, leaving the residue for only 7 %. The relationship between a response variable and the explanatory variables measured by the correlation coefficient  $R = 0.9642$ , which shows that the outcome variable is strongly associated with the explanatory variables.

## CONCLUSION

This study examined fuel injectors commonly used in spark engines, especially fuel injectors with pressure swirl atomizers.

According to a statistical approach on a large database, it was possible to correlate the variables involved. Through analysis of variance four models for the liquid film thickness calculation have been evaluated. The best model was the Risk & Lefebvre equation considering its best results in significance.

Also the paper presents a model for predicting the droplet average velocity of the spray at a certain section downstream the discharge with coordinates ( $Z$ ;  $\theta_g$ ) of an axisymmetric conical spray. The model with dimensionless variables correlated the injector geometry data and operating conditions.

## REFERENCES

- Taylor, C. F., 1988, *Análise dos motores de combustão interna*. São Paulo: Edgard Blücher, v. 2. (in Portuguese)
- Lefebvre, A. H., 1996, *Introduction to atomizer and spray technology*. Manchester: University of Manchester-UMIST (10 Short course on Atomizer & Spray Technology).
- Yule, A. J., Lefebvre, A.H., Azzopardi, B. J., Turner, J.T., and Jasuja, A. K., 1996, *Introduction to atomizer and spray technology*. Manchester: University of Manchester-UMIST (10th Short Course on Atomizer & Spray Technology).

Received: October 07, 2009

Revised: November 07, 2009

Accepted: December 07 2009

Chrysosakos, C. A., Assanis, D. N., Lee, J., and Nishida, K., 2003, *Fuel spray simulation of high-pressure swirl-injector for DISI engines and comparison with laser diagnostic measurements*, Michigan: University of Michigan.

Souza, E. J. J., 2009, *Concepção e desenvolvimento de correlações experimentais para a simulação, controle e otimização de sprays gerados em atomizadores mecânicos-centrifugos*; Tese de Doutorado; Programa de Pós Graduação em Engenharia e Ciências dos Materiais da Universidade Federal do Paraná, Curitiba, Brazil. (in Portuguese)

Lefebvre, A. H., 1989, *Atomization and sprays*. London: Taylor & Francis (Combustion: An International Series).

Welty, J. R., Wicks, C. E., and Wilson, R. E., 1984, *Fundamentals of momentum, heat and mass transfer*, 3<sup>rd</sup> ed., New York: John Wiley & Sons.